### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## (19) World Intellectual Property Organization

International Bureau



# A TREATA BURNAFOR IN BURNA (TREAT BODIN <del>daun auch a fan 1807)</del> burna 1880 (1888 bodin deut bodin 1881) ber had far

(43) International Publication Date 13 May 2004 (13.05.2004)

PCT

### (10) International Publication Number WO 2004/039260 A1

(51) International Patent Classification<sup>7</sup>: A61N 1/365, C09K 19/02

A61B 5/11 //

(21) International Application Number:

PCT/SE2003/001676

(22) International Filing Date: 28 October 2003 (28.10.2003)

(25) Filing Language:

**English** 

(26) Publication Language:

English

(30) Priority Data:

0203220-9

31 October 2002 (31.10.2002)

(72) Inventor; and

(75) Inventor/Applicant (for US only): DOWLING, Kenneth [US/SE]; Saltstigen 4, S-196 33 Kungsängen (SE).

(74) Common Representative: ST JUDE MEDICAL AB; Patent Department, Veddestavägen 19, S-175 84 Järfälla (SE).

(81) Designated State (national): US.

(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).


#### Published:

with international search report

(71) Applicant (for all designated States except US): ST JUDE MEDICAL AB [SE/SE]; Veddestavägen 19, S-175 84 Järfälla (SE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: NEW MOTION SENSOR

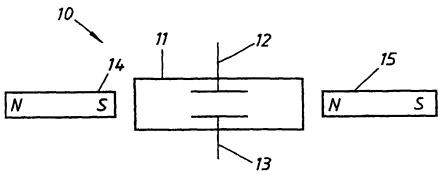

(57) Abstract: The invention relates to an implantable motion sensor for measuring a patient's activity level comprising fluid-tight, bio-compatible housing, a plurality of electrodes being coupled to the housing, the housing comprising a fluid that the fluid comprises at least one anisotropic molecule, the anisotropic properties of which are changed in relation to the motion of the fluid, whereby the state of the anisotropic molecules

of the fluid is detectable by the electrodes. Hereby, the only moving part of the sensor is the anisotropic fluid. Hence, the sensor can be made very small. Furthermore, the invention relates to an implantable cardiac pacemaker comprising the motion sensor of the invention.

